



SCHEDA TECNICA

# PARIDE

## freud.

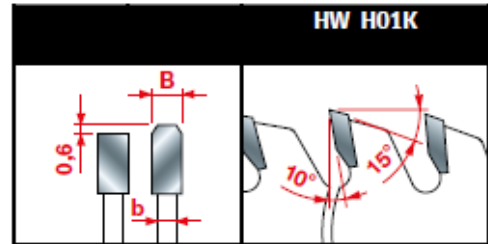

Tooth features - Caratteristiche del dente

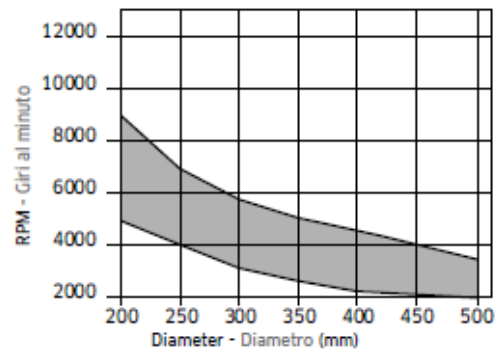

Minimum and maximum RPM based on the blade diameter.

Fascia del N. giri minimo e massimo consigliati in funzione del diametro della lama.

D	B	b	d	Z	NL	Code	SAP
mm	mm	mm	mm		FT	Codice	SAP
200	2,8	2,2	30	54		LUSA 0100	F03FS05181
250	3,5	3,0	30	60	FT02	LUSA 0200	F03FS05182
250	3,5	3,0	32	60	2/11/63	LUSA 0300	F03FS05183
275	3,5	3,0	40	68	2/9/55+4/12/64	LUSA 0400	F03FS05185
300	3,5	3,0	30	72	FT02	LUSA 0500	F03FS05186
300	3,5	3,0	32	72	2/11/63	LUSA 0600	F03FS05187
330	3,5	3,0	30	84	FT02	LUSA 0800	F03FS05190
330	3,5	3,0	32	84	2/11/63	LUSA 0900	F03FS05192
350	3,5	3,0	30	84	FT02	LUSA 1000	F03FS05193
350	3,5	3,0	32	84	2/11/63	LUSA 1100	F03FS05194
350	3,5	3,0	40	84	2/9/55+4/12/64	LUSA 1200	F03FS05196
370	3,5	3,0	30	90		LUSA 1300	F03FS05197
370	3,5	3,0	50	90	4/15/80	LUSA 1400	F03FS05198
380	3,5	3,0	32	96	2/11/63	LUSA 1500	F03FS05199
400	3,5	3,0	30	96	2/11/63	LUSA 1600	F03FS05200
400	3,5	3,0	32	96	2/11/63	LUSA 1700	F03FS05202
400	3,5	3,0	40	96	2/12/64+2/15/80	LUSA 1800	F03FS05205
400	3,5	3,0	50	96	4/15/80	LUSA 1900	F03FS05206
420	3,5	3,0	30	96	2/11/70	LUSA 2000	F03FS05207
450	4,0	3,2	30	108	2/11/63	LUSA 2100	F03FS05208
450	4,0	3,2	32	108	2/11/63	LUSA 2200	F03FS05210
450	4,0	3,2	40	108	2/12/64+2/15/80	LUSA 2300	F03FS08047
450	4,0	3,2	50	108	4/15/80	LUSA 2400	F03FS07420
500	4,0	3,2	30	120	2/10,5/70	LUSA 2500	F03FS05212
500	4,0	3,2	32	120	2/11/63	LUSA 2600	F03FS05214
500	4,0	3,2	50	120	4/15/80	LUSA 2700	F03FS08244
500	4,4	3,5	30	120		LUSA 3000	F03FS07543
530	4,2	3,5	30	126	2/10,5/70	LUSA 2800	F03FS06607
550	4,2	3,5	30	132	2/10,5/70	LUSA 2900	F03FS06608

[WWW.FERRAMENTAPARIDE.IT](http://WWW.FERRAMENTAPARIDE.IT)