



SCHEDA TECNICA

PARIDE

freud.

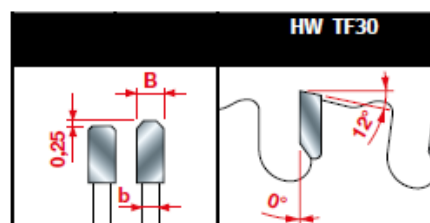

Tooth features - Caratteristiche del dente

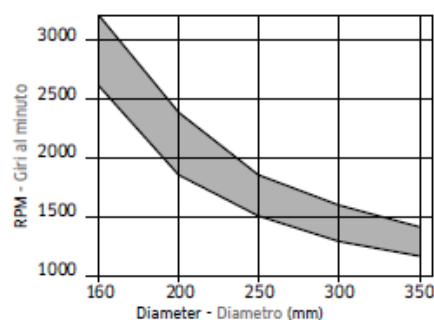

Minimum and maximum RPM based on the blade diameter.

Fascia del N. giri minimo e massimo consigliati in funzione del diametro della lama.

D mm	B mm	b mm	d mm	Z	NL FT	Code Codice	SAP SAP
160	2,0	1,6	20	30		LU6A 0100	F03FS05343
184	2,0	1,6	15,88	38		LU6A 0200	F03FS05344
184	2,0	1,6	15,88	48		LU6A 1900	F03FS06586
190	2,0	1,6	30	38		LU6A 0300	F03FS05345
210	2,0	1,6	30	40		LU6A 0400	F03FS05346
216	2,0	1,6	30	40		LU6A 0500	F03FS05347
230	2,0	1,6	30	48	FT01	LU6A 0600	F03FS05348
230	2,4	2,0	25,4	44		LU6A 0700	F03FS05349
250	2,4	2,0	30	48	FT01	LU6A 0800	F03FS05350
254	2,4	2,0	25,4	50		LU6A 0900	F03FS05351
254	2,4	2,0	25,4	60		LU6A 1000	F03FS05352
300	2,6	2,2	30	60	FT01	LU6A 1700	F03FS05359
300	2,6	2,2	30	80	FT01	LU6A 1800	F03FS05360
305	2,6	2,2	25,4	60		LU6A 1100	F03FS05353
305	2,6	2,2	25,4	80		LU6A 1200	F03FS05354
350	2,6	2,2	30	72	FT01	LU6A 1300	F03FS05355
350	2,6	2,2	30	90	FT01	LU6A 1400	F03FS05356
355	2,6	2,2	25,4	72		LU6A 1500	F03FS05357
355	2,6	2,2	25,4	90		LU6A 1600	F03FS05358

WWW.FERRAMENTAPARIDE.IT