
SCHEDA TECNICA

SPARIDE JUVEL S.R.L.

SERRATURA INFILARE CILINDRO CATENACCIO + SCROCCO JUWEL TRIPLICE CHIUSURA



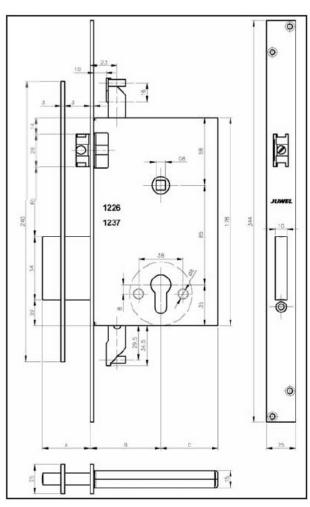

ARTICOLO / ITEM		1206	1207	1216	1217	1226	1237	1606	1616	1617
MANDATE / KEY TURNS		2	2	3	3	2	3	2	3	3
	A=	21	21	31	31	21	31	21	31	31
ENTRATA / ENTRY	B=	60	70	60	70	60	70	60	60	70
	C=	36	36	49	49	36	49	36	49	49
PESO / WEIGHT	Kg.	1,17	1,10	1,20	1,27	2,37	2,73	0,64	0,79	0,83
		1 VIA + SCROCCO 1 WAY + SPRING LATCH				3 VIE + SCROCCO 3 WAYS + SPRING LATCH		1 VIA SENZA SCROCCO 1 WAY WITHOUT SPRING LATCH		

WWW.FERRAMENTAPARIDE.IT