



Cremonesi ad inversione E=15 con HM spostata e nottolino

Disegni tecnici



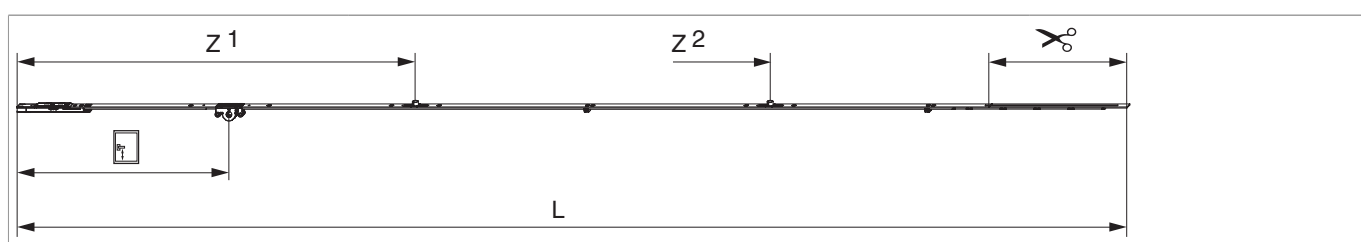

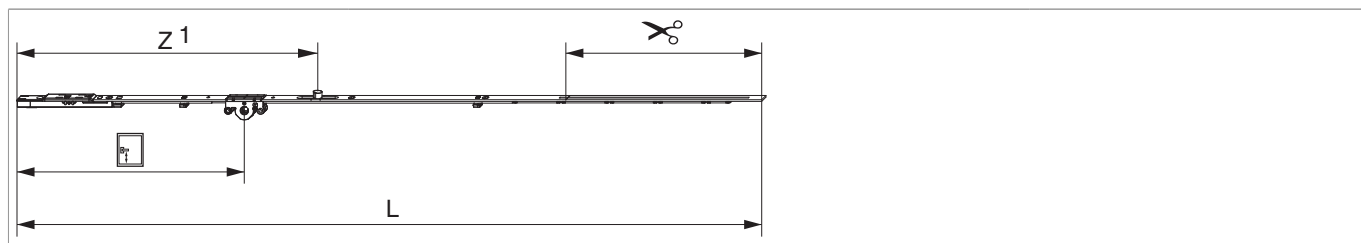



		L						Nº
argento	1090	985	15	300	841 - 1.090	259	10	212008
	1340	1.236,5	15	400	1.091 - 1.340	260,5	10	212009
	1590	1.486,5	15	500	1.341 - 1.590	260,5	10	212010
	1700	1.596,5	15	500	1.591 - 1.700	260,5	10	212724
	1950	1.846,5	15	500	1.701 - 1.950	260,5	10	218505
	2200	2.096,5	15	400	1.951 - 2.200	260,5	10	212727
				500	1.951 - 2.200	260,5	10	212726

Tabella posizionamento viti



Nº		1	2	3	4	5	6	7	8	9	10	
212008	5	28	119,5	374	485	617						
212009	7	28	119,5	228,5	474	585	685	868,5				
212010	7	28	119,5	315	574	695	785	1.119				
212724	8	28	119,5	315	574	774	885	1.020	1.229			
218505	10	28	119,5	315	550	705	795	863,5	1.124	1.388	1.465	
212727	10	28	119,5	326	474	705	795	1.085	1.375	1.729		
212726	10	28	119,5	315	574	705	795	1.085	1.375	1.465	1.729	



Tabella punti di chiusura

N°		Z1	Z2	
212008	1	395		
212009	1	540		
212010	1	740		
212724	1	840		
218505	2	750	1.420	
212727	2	750	1.420	
212726	2	750	1.420	