


SCHEDA TECNICA



SERRATURA DI SICUREZZA PER MONTANTI CASSA STRETTA OMEC

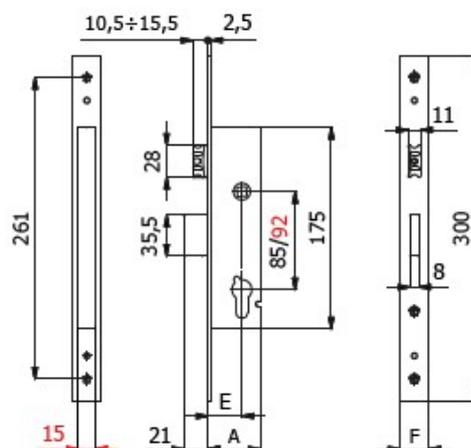

COD.	E	F	A	interasse centre distance	mandate throws			
1600S.25.16	25	16	41	85	2	0,60	1	5
1600S.25.22	25	22	41	85	2	0,66	1	5
1600S.25.25	25	25	41	85	2	0,68	1	5
1600S.30.16	30	16	46	85	2	0,64	1	5
1600S.30.22	30	22	46	85	2	0,70	1	5
1600S.30.25	30	25	46	85	2	0,72	1	5
1600S.35.16	35	16	51	85	2	0,68	1	5
1600S.35.22	35	22	51	85	2	0,74	1	5
1600S.35.25	35	25	51	85	2	0,76	1	5
1600S.40.16	40	16	56	85	2	0,72	1	5
1600S.40.22	40	22	56	85	2	0,78	1	5
1600S.40.25	40	25	56	85	2	0,80	1	5
1620S.**.**	-	-	-	92	-	-	-	-