

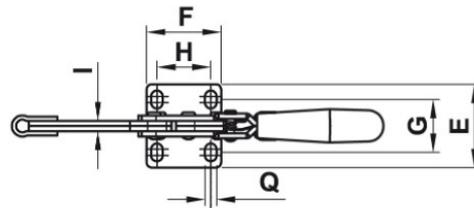
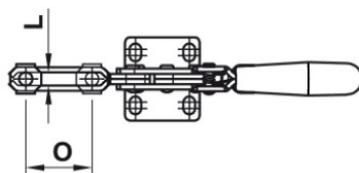


SCHEDA TECNICA

PARIDE

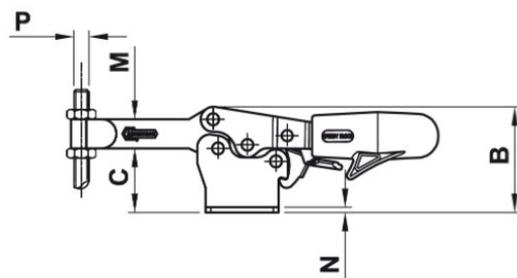

SISTEMA DI SERRAGGIO SPEEDY BLOCK ORIZZONTALE SERIE ML – OL

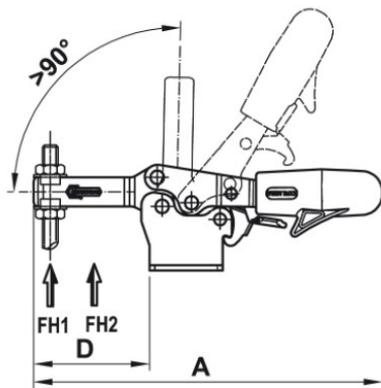

**FORMA
ML**

**FORMA
OL**

Codice	Desc	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	Fh1 (daN)	Fh2 (daN)	gr
AD092	75/ML	118	37	20	39	26	28	16-19	13,5		5,3	11	2	20	M5	4,5	90	135	90
DS100	75/MLX	118	37	20	39	26	28	16-19	13,5		5,3	11	2	20	M5	4,5	90	135	90
AD096	75/OL	118,5	37	20	39,5	26	28	16-19	13,5	4		11	2		M5	4,5	90	135	90
DS104	75/OLX	118,5	37	20	39,5	26	28	16-19	13,5	4		11	2		M5	4,5	90	135	90
AD152	130/ML	171,5	51	30,5	56,5	40	36	22,4-28,4	26		6,3	16	2,5	32	M6	5,6	100	200	200
DS152	130/MLX	171,5	51	30,5	56,5	40	36	22,4-28,4	26		6,3	16	2,5	32	M6	5,6	100	200	200
AD156	130/OL	172	51	30,5	57	40	36	22,4-28,4	26	5		16	2,5		M6	5,6	100	200	200
DS156	130/OLX	172	51	30,5	57	40	36	22,4-28,4	26	5		16	2,5		M6	5,6	100	200	200
AD290	230/ML	196	61,5	36,5	65	44	44	26-31,5	26		8,5	18	3	37	M8	6,6	170	330	320
DS287	230/MLX	196	61,5	36,5	65	44	44	26-31,5	26		8,5	18	3	37	M8	6,6	170	330	320
AD294	230/OL	196,5	61,5	36,5	66	44	44	26-31,5	26	6		18	3		M8	6,6	170	330	330
DS291	230/OLX	196,5	61,5	36,5	66	44	44	26-31,5	26	6		18	3		M8	6,6	170	330	330
AD390	355/ML	269	83	50	100	58	60	38,8-43	41		10,5	22	3,5	58	M10	8,6	180	400	750
AD394	355/OL	270	83	50	101	58	60	38,8-43	41	7		22	3,5		M10	8,6	180	400	750
AD490	455/ML	308	99	60	114	65	70	40-43	41,5		12,5	26	4	65	M12	8,7	320	620	1200
AD494	455/OL	306,5	99	60	115,5	65	70	40-43	41,5	10		26	4		M12	8,7	320	620	1220